

Truss spacers give framers fast and accurate spacing for trusses, rafters, or floor joists. The TS and TSX eliminate the need to mark layouts on bearing plates, improve installation speed, and help eliminate spacing errors. These spacers are light weight and compact.

Materials: See chart

Installation:

- Use (1) 8d nail per end to fasten units to trusses, rafters, or floor joists.


Important: These units provide spacing guides only. Do not rely on the TS or TSX for bracing.

Joist Width	USP Stock No. ¹	Ref. No.	Steel Gauge	O. C. Spacing	Overall Length	Sections Per Piece	Code Ref.
1-1/4	TS	--	20	24"	2' 1-1/2"	1	120
1-1/2	TSX24	TSF2-24	22	24"	10'	5	


1) TSX spacers are shipped folded.



TS single-unit spacer

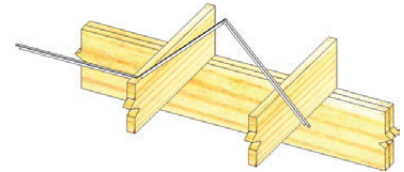

Typical TSX installation

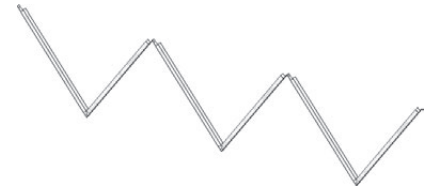

TSX multi-unit spacer


DRAG STRUT CONNECTOR – LDSC & DSC SERIES

Transfers lateral loads from girder truss into bearing walls.


Materials: See chart
Finish: USP primer
Codes: ESR-1465, FL817

Installation:

- Use all specified fasteners. See Product Notes, page 11.
- WS3 Wood Screw, 1/4" dia. x 3" long, are supplied with DSC4 connector.

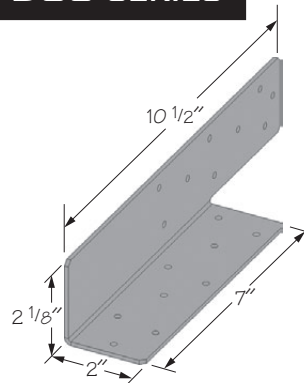


LDSC4L left shown



Typical DSC4R installation

USP Stock No.	Ref. No.	Steel Gauge	Fastener Schedule ^{2,3}				Allowable Tension Loads (Lbs.) ¹				Code Ref.
			Truss		Top Plate		DF-L / SP		S-P-F		
			Qty	Type	Qty	Type	Compression	Tension	Compression	Tension	
LDSC4L/R	--	14	9	10d x 1-1/2	9	10d x 1-1/2	1640	1640	1425	1425	11,
DSC4L/R	DSC5R/L-SDS3	3	16	WS3	16	WS3	4965	4945	4270	4250	F12

1) Allowable loads have been increased 60% for wind or seismic loads; no further increase shall be permitted.
 2) WS3 wood screws are 1/4" x 3" and are included with DSC4 connector.
 3) 10d x 1-1/2 nails are 9 gauge (0.148" diameter) by 1-1/2" long.



DSC4R right shown

©Copyright 2011 USP Structural Connectors®

Plated Truss