

FPH24-TZ FENCE RAIL HANGER





USP's Fence Rail Hanger, FPH24-TZ, attaches 2 x 4 fence rails to wood posts. The Triple Zinc (G-185) galvanized finish offers superior corrosion resistance in outdoor applications and/or with treated wood.

Materials: 18 gauge
Finish: G-185 Galvanizing



Installation:

- Use all specified fasteners.
- Fasteners need to be Hot-Dip Galvanized for outdoor applications and for use with preservative treated wood.

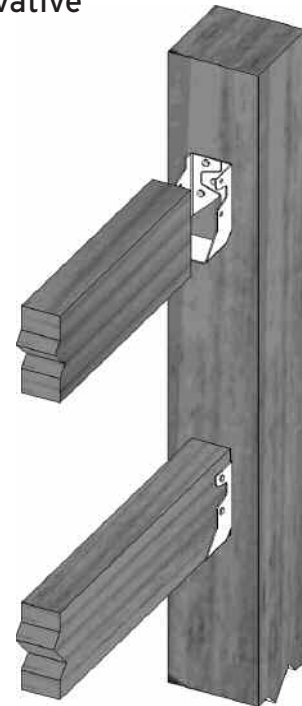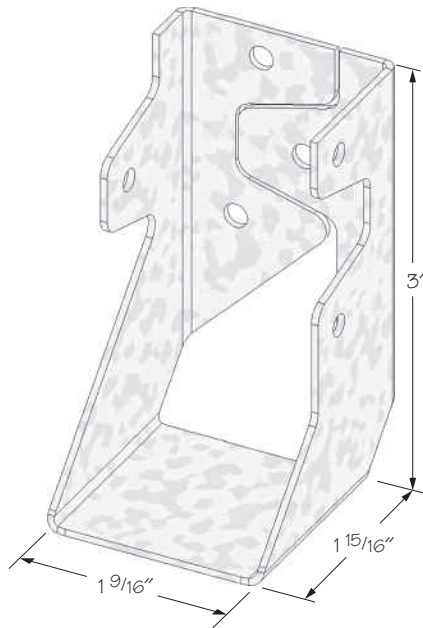

SALES SHEET

Joist Size	USP Stock No.	Ref. No.	Steel Gauge	Fastener Schedule		Factored Resistance ¹				Ctn Qty	*2008 Retail Price Each
				Header	Joist	DF-L / SP		S-P-F			
						Bearing	Uplift	Bearing	Uplift		
						100%	115%	100%	115%		
2 x 4	FPH24-TZ	---	18	(3) 8d x 1-1/2 (3) 10d x 1-1/2	(3) 8d x 1-1/2 (3) 10d x 1-1/2	410 485	545 560	350 420	465 485	200	\$0.72

1) The factored resistances given above are for Limit States Design in accordance with the 1995 National Building Code of Canada. They have been converted from allowable working stresses developed using the 2001 National Design Specification and ICC-ES AC13 Acceptance Criteria for Joist Hangers And Similar Devices.
 2) The 115% values are short-term loads such as wind and earthquake. For capacities not including a duration of load increase (100%) divide the values by 1.15.
 *2008 Pricing subject to change without notice.



USP supplies quality products to build Stronger Safer Structures

Customer Service:
 Canada
 Phone: 1.800.387.3589
 Fax: 1.877.669.6955

Manufacturing:
 Montgomery, MN • Livermore, CA
 Largo, FL • Thornhill, Ontario

Warehouses:
 Houston, TX
 Lumberton, NJ