



MSTAM24 STRAP TIE

MASONRY APPLICATION

USP's MSTAM24 Strap Tie can be used to connect framing members to wall structures. Allowable loads are based upon the proper use of fasteners installed as per the manufacturer's specifications:

Installation:

- Masonry screw shall be $\frac{1}{4}$ " diameter.
- Minimum masonry screw embedment shall be $1\frac{1}{2}$ ".
- Install masonry screws **only** in **shaded fastener holes** as indicated on illustration to achieve listed loads.

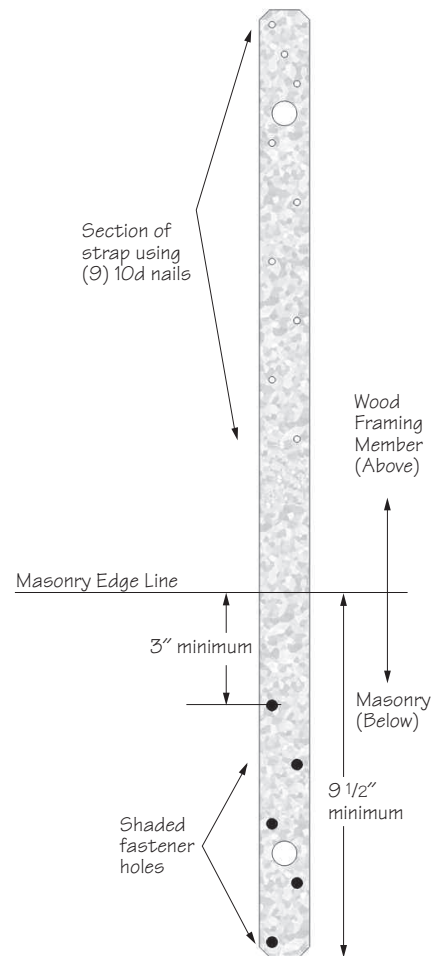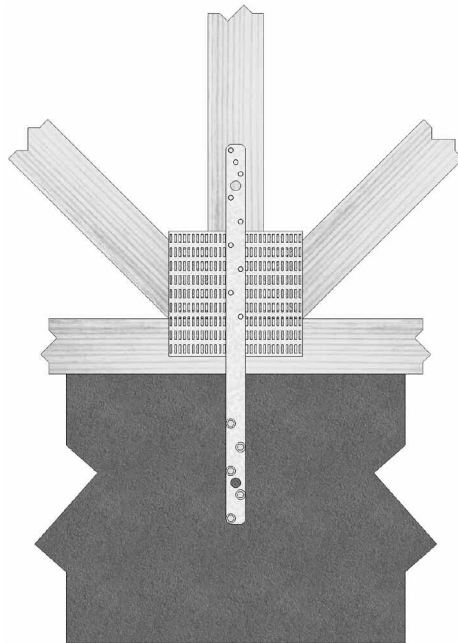

USP Stock No.	Description	Fastener Schedule ²		Allowable Loads (Lbs.) ^{1,3,5}	
		Wood Nails ⁴	Masonry Screw Anchor	Uplift	
MSTAM24	1-1/4" x 24" Strap Tie	(9) 10d Common	(5) 1/4" Tapcon	1405	1545

- 1) Allowable loads assume use of ITW Buildex 1/4" x 2-1/4" Tapcon fasteners.
- 2) Fasteners to be installed per manufacturer's specifications.
- 3) Allowable loads assume specified holes to be filled.
- 4) A 10d common nail is 3 inches long and 0.148 inches in diameter.
- 5) Allowable loads are derived from tests performed using hollow C90 concrete block.

USP supplies quality products to build Stronger Safer Structures



Customer Service:
Burnsville, MN
Phone: 1-800-328-5934
Fax: 1-507-364-8762

Manufacturing:
Montgomery, MN • Livermore, CA
Largo, FL • Rancho Cucamonga, CA
Thornhill, Ontario

Warehouses:
Houston, TX
Lumberton, NJ

www.USPconnectors.com

Information valid until December 31, 2009.

A GIBRALTAR INDUSTRIES COMPANY 

USP2074-071