



FastenMaster.

TrussLok-Z[®]

MULTI-PLY GIRDER TRUSS FASTENER

No Predrilling. They ZIP right in! Engineered for any multi-ply dimensional wood application.

- Correct screw lengths for two-, three- or four-ply girders
- Proper thread length to engage final ply. Eliminates board jacking while maximizing shear strength
- IBC/IRC code compliant. ESR #1078
- Approved for single-sided installation
- Recognized by MiTek[®], Eagle[®], CompuTrus[®] and other leading truss software companies
- Prevents gapping between plies which can occur in nailed applications
- Works in 1½" truss chords (LVL & LSL)
- Great for carrying beams, headers, bracing and other multi-ply wood applications
- Hex driver bit included



Photograph should not be used as a reference for fastening patterns.




For more information
call USP at 1.800.328.5934
or 1.952.898.8772

www.USPconnectors.com

INSTALLATION PROCEDURE

- Install using a ½" corded or 18 volt cordless drill.
- Bring underside of washer-head flush with wood surface. Do not countersink.
- Choose correct TrussLok-Z length. See below.
- Always refer to truss manufacturer's literature for proper fastening pattern, design load information and additional fastener installation requirements.
- Maintain a minimum distance of 2" from any edge and 4" from end of beam.

FastenMaster TrussLok-Z Length Selection Guide

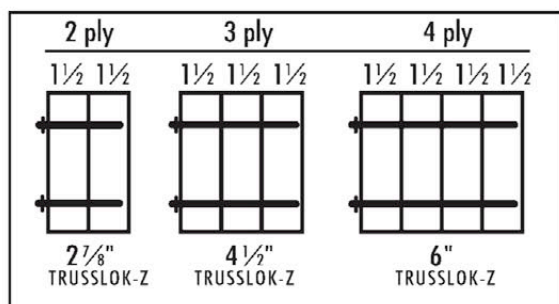

A design professional should be consulted when making critical connections to ensure the proper number and location of all fasteners meet national and local code requirements.

For complete design values and engineering data, available through ICC-ES, see report ESR #1078 at www.icc-es.org.

For technical assistance or questions regarding proper use of this fastener, please contact FastenMaster Technical Support at 800-518-3569 or visit www.FastenMaster.com.

PRODUCT FEATURES

BUILT UP "CHAMFER" UNDER HEAD FOR ADDED STRENGTH

EPOXY COATED WITH ANTI-FRICTION TOP COAT

CORRECT THREAD LENGTH. DRAWS PLYS TOGETHER WITHOUT "BOARD JACKING"

SHARP GIMLET POINT FOR FAST DRILLING



USP Stock No.	Ref. No.	Screw Length	Threading	Ctn Qty
MTSZ278-50	SDW22300-R50	2-7/8"	1-3/8"	50
MTSZ412-50	SDW22438-R50	4-1/2"	1-3/8"	50
MTSZ006-50	SDW22600-R50	6"	1-3/8"	50
MTSZ278-500	SDW22300, SDW22300MB	2-7/8"	1-3/8"	500
MTSZ412-250	SDW22438, SDW22438MB	4-1/2"	1-3/8"	250
MTSZ006-250	SDW22600, SDW22600MB	6"	1-3/8"	250

Contact USP for pricing.

For more information
call USP at 1.800.328.5934
or 1.952.898.8772

www.USPconnectors.com