

TECHNICAL BULLETIN


THDH48 Masonry Application

Masonry Installation Option for THDH48 Heavy-Duty Truss Hanger

USP's *THDH48 Heavy-Duty Truss Hanger* can be used to connect 4x8 or 4x10 plated wood trusses, rafters, or joists to masonry wall structures. Allowable loads are based upon the proper use of fasteners installed per manufacturer's specifications:

- Masonry screw shall be 3/16" diameter.
- Minimum masonry screw embedment shall be 1 3/4".
- Install masonry screws **only** in **shaded fastener holes** as indicated on illustration to achieve listed loads.
- Hanger applications are designed to meet minimum edge distance requirements when installed flush to the top of the concrete masonry unit.

Masonry Edge Line

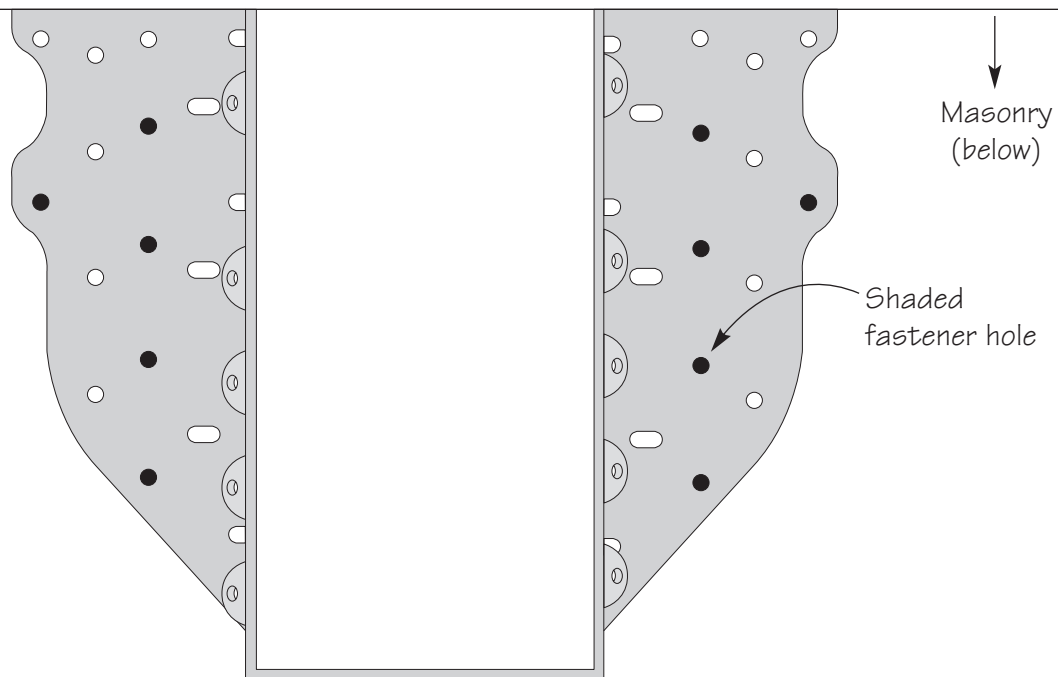

| USP Stock No. | Ref. No. | Description | Steel Gauge | Fastener Schedule ² | | Allowable Loads (Lbs.) ^{1,3} | | | |
|---------------|----------|----------------------------------|-------------|--------------------------------|----------------|---------------------------------------|------|--------|------|
| | | | | Joist Nails ^{4,5} | Masonry Screws | 100% | 125% | Uplift | |
| | | | | | | | | 133% | 160% |
| THDH48 | HGUS48 | 4 x 8-10 Heavy-Duty Truss Hanger | 12 | (10) 16d | (10) 3/16 | 1905 | 1905 | 1865 | 1905 |

- 1) Allowable loads assume use of Powers® Fasteners 3/16" Tapper™ minimum embedment of 1-3/4".
- 2) Fasteners to be installed per manufacturer's specifications.
- 3) Allowable loads assume specified holes to be filled.
- 4) Minimum nail embedment shall be 1-15/16" for 16d nails.
- 5) Joist nails shall not be installed in "double shear" configuration as is normally required for this hanger.

San Francisco Office
 2150 Kitty Hawk Road
 Livermore, CA 94551-9522
 1-800-227-0470 ▪ Fax: 1-925-373-9213

Minneapolis Corporate Office
 703 Rogers Drive
 Montgomery, MN 56069-1324
 1-800-328-5934 ▪ Fax: 1-507-364-8762

Tampa Office
 11910 62nd Street North
 Largo, FL 33773-3705
 1-800-443-6442 ▪ Fax: 1-727-535-8199